


TECHNICAL DATA SHEET

NYLON X-LUBE BUSHES SHOULDERED METRIC

Stock	Part	Inside Diameter	Outside Diameter	Length Overall	Flange Diameter	Flange Thickness
Code	Number	(mm)	(mm)	(mm)	(mm)	(mm)
742010	S 200M	4	8	22	10	2
742030	S 80M	5	8	5	15	2
742050	S 201M	5	10	22	13	2
742070	S 202M	6	10	22	13	2
742110	S 48M	8	12	12	16	2
742090	S 205M	8	12	37	15	2
742130	S 272M	8	12.5	12	18	2
742150	S 55M	8	16	16	22	3
742170	S 458M	10	14	28	28	2
742190	S 260M	10	16	17	24	3
742200	S 206M	10	16	22	20	2
742180	S 207M	10	16	37	20	2
742210	S 338M	12	16	9	20	3
742228	S 452M	12	16	16	26	1.5
742220	S 208M	12	16	22	20	2
742230	S 209M	12	16	37	20	2
742238	S 179M	12	20	23	40	3
742221	S 299M	12	22	29	26	15
742260	S 210M	16	20	22	26	2
742250	A 211M	16	20	37	26	2
742270	S 312M	20	23	25	28	2
742290	S 212M	20	25	22	32	2
742280	S 213M	20	25	37	32	2
742300	S 62M	20	25	90	35	2
742330	S 366M	23	29	22	38	5
742350	S 313M	25	28	25	35	2
742370	S 214M	25	30	27	40	2
742360	S 215M	25	30	37	40	2
742380	S 58AM	25	40	52	50	3.5
742390	S 58M	25	42	52	50	3
742395	S 527M	25	44	50	55	3
742400	S 249M	28	52	89	76	4
742410	S 216M	30	35	37	45	2
742420	S 58DM	30	40	52	50	3.5

X-Lube® is the registered trade name for our range of injection moulded bushes.

The standard material is black MoS2 nylon (self-lubricating) but other materials are available on request. They are produced in special quick change tooling developed by our company which means that we can produce additional tooling for specific requirements quickly and cost effectively.

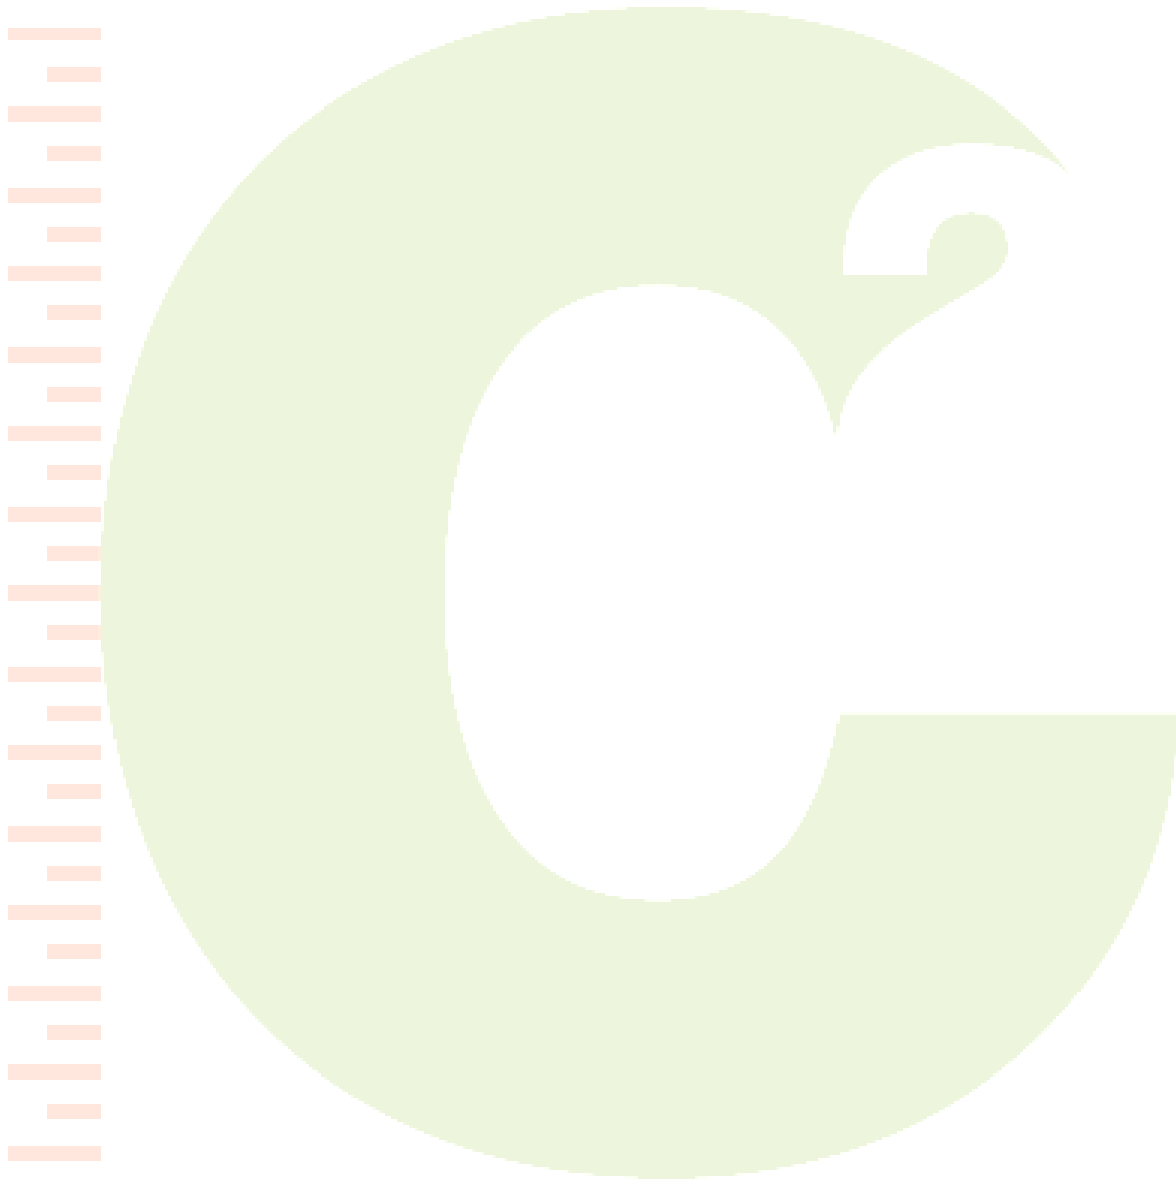

Disclaimer:

All statements, technical information and recommendations contained in this publication are for informational purposes only. Cut To Size Plastics Pty. Ltd. does not guarantee the accuracy or completeness of any information contained herein and it is the customer's responsibility to conduct its own review and make its own determination regarding the suitability of specific products for any given application.